

**July 2, 2026**

## **BID DOCUMENTS**

Village of Cass City

Sherman/Maple/Seeger Streets Sanitary Sewer Rehabilitation (CIPP Lining)

## **ADVERTISEMENT FOR BIDS**

Sealed bids for the Sherman/Maple/Seeger Street Sanitary Sewer Rehabilitation Project will be received by the Village Cass City until 2:00PM on July 23, 2026, at the Village Office located at 6506 Main St. Cass City, MI 48726, at which time the bids will be publicly opened and read aloud.

The project includes rehabilitation of the existing sanitary sewer on Sherman Street from Garfield St south to end of the main, Maple Street from Garfield St south to end of the main and Seeger Street from Garfield St south to 6<sup>th</sup> St by Cured-in-Place Pipe (CIPP) lining and related work including cleaning, televising, bypass pumping, and restoration.

Also, included in work to be performed is an 8"x48" CIPP spot liner on Highpoint Dr

## **1. PROJECT OVERVIEW**


Location:

- Sherman Street from Garfield St south to end of the main (383ft)
- Maple Street from Garfield St south to end of the main (402ft)
- Seeger Street from Garfield St south to 6<sup>th</sup> St (372ft)
- Highpoint Dr 8"x48" CIPP spot liner
- Total Length: Approximately 1157 linear feet+ 48" spot liner
- Pipe Sizes: 8"
- Method: Cured-in-Place Pipe (CIPP) trenchless lining 6mm liner thickness
- Project to be completed by December 1, 2026

**In accordance with Federal Law and U.S. Department of Agriculture policy, this institution is prohibited from discriminating on the basis of race, color, national origin, sex, age or disability.**

**This institution is an equal opportunity provider and employer.**

**6506 Main St., P.O. Box 123, Cass City, MI 48726 \* 989-872-2911 \* Fax 989-872-4855 \*  
TTY 989-872-4742 or e-mail: casscity.org**

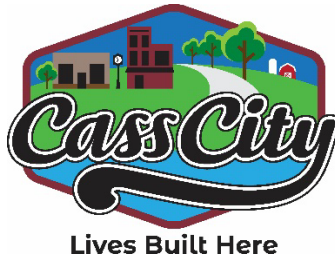

## **2. SCOPE OF WORK**

Work includes but is not limited to:

1. Cleaning and televising existing sanitary sewers.
2. Installation of CIPP liners in designated segments.
3. Installation of Spotliner as needed.
4. Reinstatement of service laterals.
5. Pre- and post-lining CCTV inspections.
6. Temporary bypass pumping.
7. Traffic control per MDOT requirements.
8. Site and surface restoration.

All work shall conform to ASTM F1216/F1743 and applicable EGLE standards.

### **Bids shall be submitted on contractors' letterhead.**

If you should have any questions, please contact RJ Klaus at 989-872-2911 or at [dpwcc@casscity.org](mailto:dpwcc@casscity.org). Bids should be priced by the individual section and total cost. Bids may be mailed or dropped off at Village of Cass City Municipal Building, 6506 Main St. P.O. BOX 123 Cass City, MI 48726 by 2:00 pm, July 23, 2026.

**In accordance with Federal Law and U.S. Department of Agriculture policy, this institution is prohibited from discriminating on the basis of race, color, national origin, sex, age or disability.**


**This institution is an equal opportunity provider and employer.**

**6506 Main St., P.O. Box 123, Cass City, MI 48726 \* 989-872-2911 \* Fax 989-872-4855 \*  
TTY 989-872-4742 or e-mail: [casscity.org](mailto:casscity.org)**




Lives Built Here


**Sherman St**

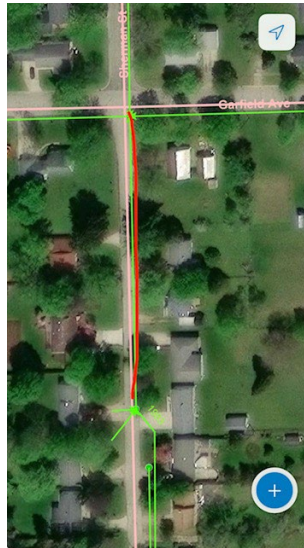

**Maple St**

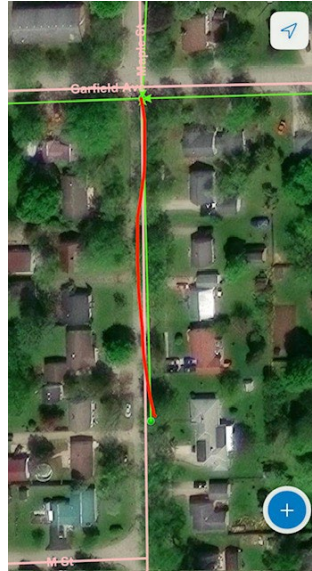

**Seeger St**

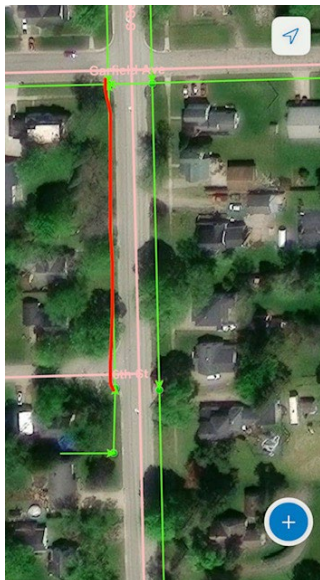

**Highpoint Dr**



In accordance with Federal Law and U.S. Department of Agriculture policy, this institution is prohibited from discriminating on the basis of race, color, national origin, sex, age or disability.

This institution is an equal opportunity provider and employer.

6506 Main St., P.O. Box 123, Cass City, MI 48726 \* 989-872-2911 \* Fax 989-872-4855 \*  
TTY 989-872-4742 or e-mail: [casscity.org](mailto:casscity.org)